

**Makita**<sup>®</sup>

40Vmax series

**XGT**

**40V** **Li-ion**  
**max**



**XGT**

# 40V Li-ion max

**High Power**

**Durability**

**Digital  
Communication**

**Combination Hammer**  
HR001G / HR002G / HR003G / HR004G

**Recipro Saw**  
JR001G

**Impact Wrench**  
TW001G

**Driver Drill**  
DF001G

**Hammer Driver Drill**  
HP001G

**Impact Driver**  
TD001G

**Angle Grinder**  
GA003G / GA004G / GA005G /  
GA011G / GA012G / GA013G

**Circular Saw**  
HS003G / HS004G

# Index

---

**4 — 40Vmax Li-ion Battery  
40Vmax Fast Charger**

**6 — Impact Driver**  
TD001G

**8 — Driver Drill  
Hammer Driver Drill**  
DF001G / HP001G

**10 — Impact Wrench**  
TW001G

**12 — Angle Grinder**  
GA003G / GA004G / GA005G  
GA011G / GA012G / GA013G

**14 — Combination Hammer**  
HR001G / HR002G / HR003G / HR004G

**16 — Circular Saw**  
HS003G / HS004G

**18 — Recipro Saw**  
JR001G





# 40V Li-ion max

Tool ◀▶ Battery ◀▶ Battery Charger  
Digital communication

XGT is a new system with its own tools, batteries, and chargers. A combination of innovative tool design and higher output batteries provide a genuine solution for high demand industrial users.

## Optimum power supply system and Optimum charging system

The XGT range of tools and batteries come with a built-in program, providing digital communication between the battery and tool. Allowing not only for the battery to talk with tool but also the tool to talk to the battery. Battery technology and motor engineering that work together for optimum performance.

**Optimum charging system**

Auto maintenance system with two cooling fans for providing more optimum fast charging



### 40Vmax Li-ion Battery

**BL4025**  
2.5Ah  
(191B36-3)



**BL4040**  
4.0Ah  
(191B26-6)




**Charging time**

<b>BL4025</b>	<b>28 min</b>
<b>BL4040</b>	<b>45 min</b>


# 40Vmax Lithium-ion Battery Series

## Built Tough

High durability specifications specially designed for 40Vmax Li-Ion batteries

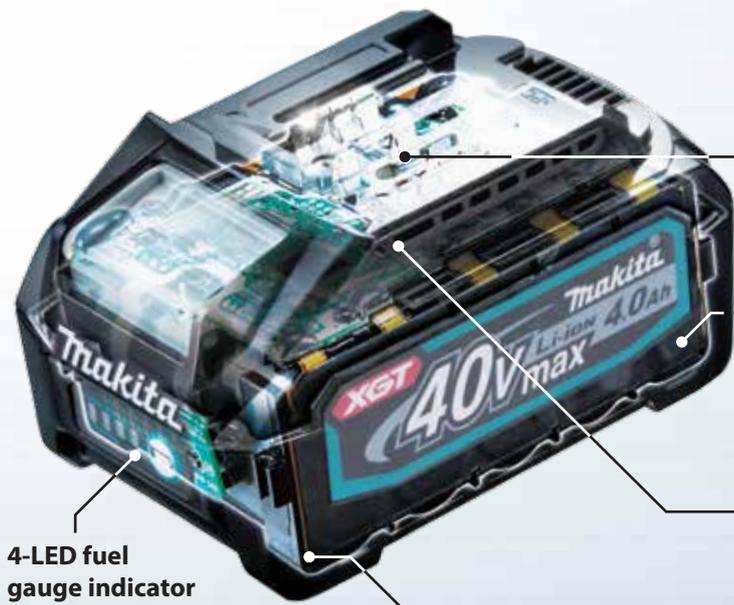

4-LED fuel gauge indicator

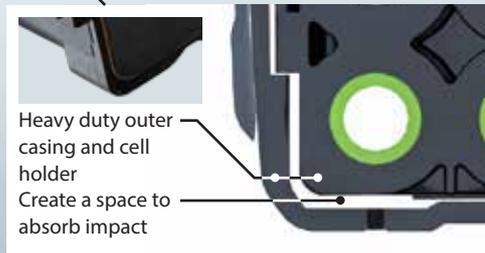


Heavy duty outer casing and cell holder  
Create a space to absorb impact

Shock absorption structure




Terminal short-circuit prevention structure

The protection wall is provided between terminals against water and dust.

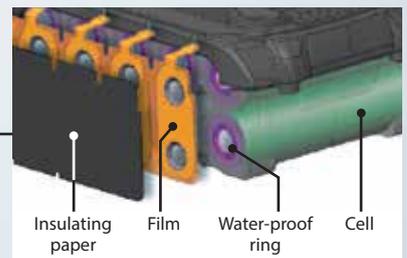

Waterproof Triple-layer Structure

prevents cell failure due to water and dust.

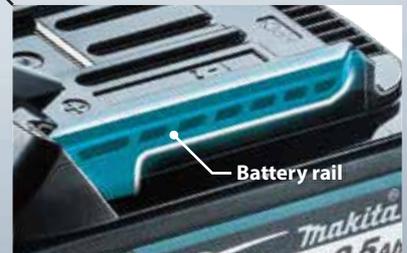

High Rigidity Battery Rails

Durable slide in battery rail that holds the battery and the tools firmly and securely to withstand high power products

## 40Vmax Fast Charger

The enlarged and raised LED light provides clearer indication of charging status.

DC40RA  
(191E08-6)



Interchangeable Adapter

ADP10  
(191C11-5)



Compatible with LXT Li-Ion batteries




**Impact Driver  
TD001G**

# Delivers 220N · m of Max Torque

## 10 Tightening modes

		No load speed / Impacts per min (min <sup>-1</sup> )	
<p><b>Wood mode</b> driving at low speed until fastening begins</p> <p>0 - 1,800 / 4,400</p>	<p><b>3 Bolt mode</b> with rotation auto stop for tightening/ loosening bolts for more efficient work</p> <p>Mode1: 2,500 / - Mode2: 3,700 / 4,400 Mode3: 3,700 / 4,400</p>	<p><b>T1 Teks screw (thin metal)</b> Driving self-drilling screws to a thin gauge metal like a metal stud</p> <p>0 - 2,400 / -</p>	<p><b>T2 Teks screw (thick metal)</b> Driving self-drilling screws to a thick gauge metal</p> <p>0 - 3,700 / 2,600</p>

### 4 -Speed power selection



### 6 -Assist modes

				No load speed / Impacts per min (min <sup>-1</sup> )			
<p><b>Max</b></p> <p>0 - 3,700 / 4,400</p>	<p><b>Hard</b></p> <p>0 - 3,200 / 3,600</p>	<p><b>Medium</b></p> <p>0 - 2,100 / 2,600</p>	<p><b>Soft</b></p> <p>0 - 1,100 / 1,100</p>	<p><b>Max</b></p> <p>0 - 3,700 / 4,400</p>	<p><b>Hard</b></p> <p>0 - 3,200 / 3,600</p>	<p><b>Medium</b></p> <p>0 - 2,100 / 2,600</p>	<p><b>Soft</b></p> <p>0 - 1,100 / 1,100</p>



**BL MOTOR XPT**

**Rigid anvil holder with ball bearings reduces bit wobbling**



about **15% UP**

**Drove  $\phi 6.5 \times 120\text{mm}$  metal fastening screws**

<b>TD001G</b>	<b>115</b>	<b>2.5s</b>
Predecessor Model 18V	<b>100</b>	
Slow		Fast

**One-touch bit installation**



**Variable speed control by trigger**

**Twin LED job light**



- **One-touch 4-speed selector** provides precise fastening control for a wide range of applications.
- **Quick-change memory mode** allows operator to rapidly change between two registered setting

**Work amount on a full battery charge\*1**

Battery: BL4025

about <b>800 pcs</b> Drove 65mm coarse thread screws	about <b>160 pcs</b> Drove 120mm metal fastening screws
---	--

Capacity	Machine Screw: M4 - M8 (5/32" - 5/16") Standard Bolt: M5 - M16 (3/16" - 5/8") High Strength Bolt: M5 - M14 (3/16" - 9/16") Coarse thread (in length): 22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	Max / Hard / Med / Soft: 0 - 3,700 / 3,200 / 2,100 / 1,100
Impacts Per Minute (IPM)	Max / Hard / Med / Soft: 0 - 4,400 / 3,600 / 2,600 / 1,100
Max Fastening Torque	220 N-m (1,950 in.lbs.)
Fastening Torque	Hard / Med / Soft: 170 / 50 / 20 N-m (1,510 / 440 / 180 in.lbs.)
Sound Pressure Level	96 dB(A)
Sound Power Level	107 dB(A)
Dimensions (L x W x H)	w/ BL4025: 120x86x245 mm (4-3/4"x3-3/8"x9-5/8") w/ BL4040: 120x86x250 mm (4-3/4"x3-3/8"x9-7/8")
Net weight	1.7 - 2.0 kg (3.7 - 4.4 lbs.)

\*1 The test results depend to a great extent on the test material etc. **7**



**Hammer Driver Drill / Driver Drill**  
**HP001G / DF001G**  
**13 mm (1/2")**

# Delivers 140N · m of Max Torque

**Solid performance**

especially in heavy duty applications by efficient brushless motor and XGT battery



**41 electronical clutch setting**  
**(21-stage setting in High mode)**

A wider range of torque can be covered than mechanical clutch



Easy jog dial adjustment with digital display

**AFT** Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.



Drone ø8 x 400mm long construction screws into 400mm thick SPF

HP / DF001G	125
18V Predecessor Model	100

Slow Fast



Drilled holes through 38mm thick SPF with ø65mm (2 - 9/16") self-feeding bit

HP / DF001G	135
18V Predecessor Model	100

Slow Fast



photo: HP001G

**BL MOTOR AFT XPT**



HP001G

Mechanical 2-speed



DF001G

Compact overall length for easy handling and control

18V Predecessor Model



HP001G: 182mm

**Work amount on a full battery charge\*<sup>1</sup>**

Battery: BL4025

about <b>40 pcs</b> Drove ø8 x 400mm long construction screws into 400mm thick SPF	about <b>90 pcs</b> Drilled holes through 38mm thick SPF with ø65mm (2 - 9/16") self-feeding bit	about <b>480 pcs</b> Drilled holes through 38mm thick SPF with 7/8" Ship Auger bit
---	---	---

**Outstanding drilling speed**

**0 - 2600 min<sup>-1</sup>**  
at High speed mode

**HP001G**

Capacity	Steel: 20 mm (13/16") / Wood (Auger-Bit): 50 mm (2") Wood (Self-Feed Bit): 76 mm (3") / Wood (Hole Saw): 152 mm (6") Masonry: 20 mm (13/16")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
Impacts Per Minute (IPM)	High / Low: 0 - 39,000 / 0 - 9,750
No Load Speed (RPM)	High / Low: 0 - 2,600 / 0 - 650
Max Fastening Torque	Hard / Soft: 140 / 68 N-m (1,240 / 600 in.lbs.)
Max lock torque	125 N-m (1,100 in.lbs.)
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	w/ BL4025: 182x86x275 mm (7-1/8"x3-3/8"x10-7/8") w/ BL4040: 182x86x282 mm (7-1/8"x3-3/8"x11-1/8")
Net weight	2.7 - 3.0 kg (6.0 - 6.6 lbs.)

**DF001G**

Capacity	Steel: 20 mm (13/16") Wood (Auger-Bit): 50 mm (2") / Wood (Self-Feed Bit): 76 mm (3") Wood (Hole Saw): 152 mm (6")
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")
No Load Speed (RPM)	High / Low: 0 - 2,600 / 0 - 650
Max Fastening Torque	Hard / Soft: 140 / 68 N-m (1,240 / 600 in.lbs.)
Max lock torque	125 N-m (1,100 in.lbs.)
Sound Pressure Level	75 dB(A)
Dimensions (L x W x H)	w/ BL4025: 181x86x275 mm (7-1/8"x3-3/8"x10-7/8") w/ BL4040: 181x86x282 mm (7-1/8"x3-3/8"x11-1/8")
Net weight	2.7 - 3.0 kg (5.9 - 6.6 lbs.)

\*1 The test results depend to a great extent on the test material etc. **9**



**Impact Wrench**  
**TW001G**  
 3/4" (19 mm)

# Over 2,000 N · m of Nut-Busting Torque

**Electronic 4-stage impact power selection**

enables user to control the power and speed depending on the applications.



**Forward and reverse rotation auto stop mode**



	Forward	Reverse
<b>mode 1</b>	Stops immediately after impact is detected	Stops immediately after the bolt/ nut gets loosened
<b>mode 2</b>	Stops approximately 0.5 seconds after impact is detected	Stops approximately 0.2 seconds after the bolt/ nut gets loosened
<b>mode 3</b>	Stops approximately 1 second after impact is detected	Shift to 230 min <sup>-1</sup> after the bolt/ nut gets loosened

No load speed (min<sup>-1</sup>)

- Max: 0-1,800
- Hard: 0-1,400
- Medium: 0-1,150
- Soft: 0-950

Impacts per minutes (min<sup>-1</sup>)

- Max: 0-2,500
- Hard: 0-2,400
- Medium: 0-2,200
- Soft: 0-1,900



**High power BL Motor**





**BL**  
MOTOR **XPT**



Twin LED job light



**Full speed mode**

Switches between variable and full speed by pressing the button. Reaches full speed with fewer pull trigger to minimize user's fatigue in continuous work.



Work amount on a full battery charge\*<sup>1</sup>

Battery: BL4040

about **350 pcs**

Tightening M27 high strength bolts

Compact overall length for easy handling and control

← **217 mm** → TW001G

Predecessor  
Model 18V



Fastening Capacities	Standard Bolt: M12 - M36 (1/2" - 1-7/16") High Strength Bolt: M10 - M27 (3/8" - 1-1/16")
Square Drive	19 mm (3/4")
No Load Speed (RPM)	Max / Hard / Med / Soft: 0 - 1,800 / 0 - 1,400 / 0 - 1,150 / 0 - 950
Impacts Per Minute (IPM)	Max / Hard / Med / Soft: 0 - 2,500 / 0 - 2,400 / 0 - 2,200 / 0 - 1,900
Max Fastening Torque	1,800 N·m (1,330 ft.lbs.)
Dimensions (L x W x H)	w/ BL4025: 217x94x297 mm (8-1/2"x3-11/16"x11-3/4") w/ BL4040: 217x94x303 mm (8-1/2"x3-11/16"x11-7/8")
Net weight	3.9 - 4.2 kg (8.6 - 9.3 lbs.)

\*1 The test results depend to a great extent on the test material etc. **11**



## Angle Grinder


Slide switch: GA003G / GA004G / GA005G  
 Paddle switch: GA011G / GA012G / GA013G  
 100 mm (4") 115 mm (4-1/2") 125 mm (5")

# Delivers same power as 1,000W corded grinders

### High durability


- Large ball bearing supports the motor.
- New switch design to reduce contact weariness.

No load speed:  
**8,500 min.<sup>-1</sup>**

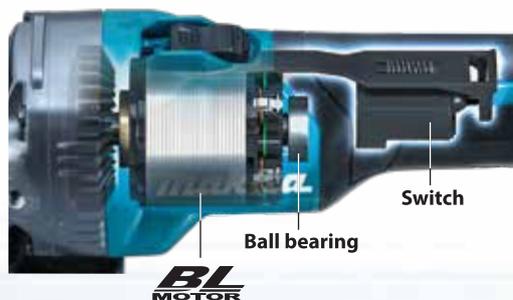


### AFT Active Feedback sensing Technology

Shuts down the tool to protect the user, if the rotation speed suddenly slows down.

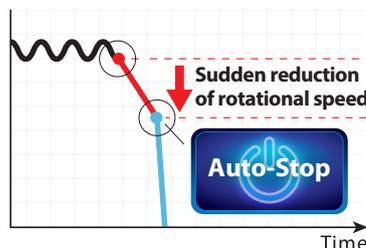

### New toolless wheel cover

allows for fast and easy angle adjustment and installation / removal of wheel cover.

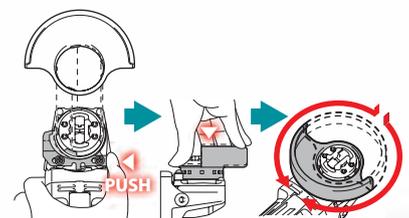

about  
**40% UP**

Cut concrete at depths of 20mm

GA005G	140
18V Predecessor Model	100

Slow Fast

Work amount on a full battery charge\*1  
 Battery: BL4040

about **7m**  
 Cutting depths: 20mm

### Accessories

Dust collection wheel guard  
 191F81-2 191G06-2





**BL MOTOR AFT XPT**



GA003G / GA004G / GA005G /  
GA011G / GA012G / GA013G

**Slide Switch**



GA005G

**Paddle Switch**



GA013G

Easy-to-hold slim grip

	Wheel Diameter	Switch	
GA003G	100 mm (4")	Slide	✓
GA004G	115 mm (4-1/2")		
GA005G	125 mm (5")		
GA011G	100 mm (4")	Paddle	✓
GA012G	115 mm (4-1/2")		
GA013G	125 mm (5")		

	GA003G	GA004G	GA005G
Wheel Diameter	100 mm (4")	115 mm (4-1/2")	125 mm (5")
Hole Diameter	16 mm (5/8")	22.23 mm (7/8")	22.23 mm (7/8")
No Load Speed (RPM)	8,500	8,500	8,500
Sound Pressure Level	81 dB(A)	81 dB(A)	81 dB(A)
Sound Power Level	92 dB(A)	92 dB(A)	92 dB(A)
Dimensions (L x W x H)	w/ BL4025: 398x117x150 mm (15-5/8"x4-5/8"x5-7/8")	w/ BL4025: 398x130x156 mm (15-5/8"x5-1/8"x6-1/8")	w/ BL4025: 398x140x156 mm (15-5/8"x5-1/2"x6-1/8")
	w/ BL4040: 410x117x162 mm (16-1/8"x4-5/8"x6-3/8")	w/ BL4040: 410x130x168 mm (16-1/8"x5-1/8"x6-5/8")	w/ BL4040: 410x140x168 mm (16-1/8"x5-1/2"x6-5/8")
Net weight	2.8 - 3.3 kg (6.2 - 7.3 lbs.)	2.9 - 3.5 kg (6.4 - 7.7 lbs.)	2.9 - 3.6 kg (6.4 - 7.9 lbs.)
	GA011G	GA012G	GA013G
Wheel Diameter	100 mm (4")	115 mm (4-1/2")	125 mm (5")
Hole Diameter	16 mm (5/8")	22.23 mm (7/8")	22.23 mm (7/8")
No Load Speed (RPM)	8,500	8,500	8,500
Sound Pressure Level	81 dB(A)	81 dB(A)	81 dB(A)
Sound Power Level	92 dB(A)	92 dB(A)	92 dB(A)
Dimensions (L x W x H)	w/ BL4025: 398x117x150 mm (15-5/8"x4-5/8"x5-7/8")	w/ BL4025: 398x130x156 mm (15-5/8"x5-1/8"x6-1/8")	w/ BL4025: 398x140x156 mm (15-5/8"x5-1/2"x6-1/8")
	w/ BL4040: 410x117x162 mm (16-1/8"x4-5/8"x6-3/8")	w/ BL4040: 410x130x168 mm (16-1/8"x5-1/8"x6-5/8")	w/ BL4040: 410x140x168 mm (16-1/8"x5-1/2"x6-5/8")
Net weight	2.8 - 3.4 kg (6.2 - 7.5 lbs.)	3.0 - 3.6 kg (6.6 - 7.9 lbs.)	3.0 - 3.6 kg (6.6 - 7.9 lbs.)

\*1 The test results depend to a great extent on the test material etc. 13



**Combination Hammer**  
HR001G / HR002G / HR003G / HR004G  
28 mm (1-1/8")

**AVT** Anti Vibration Technology

Vibration Level  
**7.0 m/s<sup>2</sup>**



**AFT** Active Feedback sensing Technology

turns the motor off if bit rotation is suddenly forced to stop.  
(HR001G / HR002G)



**Redesigned Tool Balance for Increased Operability**

The tool's center of gravity is located as close to the handle grip as possible, providing more control and less fatigue.

<b>Lightweight</b>
<b>3.9 kg</b>
Model: HR001G Battery: BL4025



**AWS** Auto-start Wireless System

connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.  
(HR001G / HR002G)



Switch on the tool



Vacuum cleaner is activated





Work amount on a full battery charge\*  
Battery: BL4025

about **120 pcs**

Drilled holes a depth of 60mm (2-3/8") with ø12.5mm bit

**BL**  
MOTOR

**AFT**

HR001G / HR002G

**AWS**

HR001G / HR002G

**AVT**

**SOFT**  
NO LOAD


HR001G / HR002G

**XPT**



Twin LED job light

Filter cleaning mechanism



Large dust box cover can be opened simply by pushing single push button for easy dust cleaning.



Quick change drill chuck (HR002G / HR004G)

Dust Extraction System

DX12 (191E52-3) / DX14 (191E58-1)



	Quick change drill chuck	AFT	AWS	Dust Extraction System
HR001G	—	✓	✓	DX12
HR002G	✓	✓	✓	DX14
HR003G	—	—	—	DX12
HR004G	✓	—	—	DX14

	HR001G / HR003G	HR002G / HR004G
Impact Energy	EPTA-Procedure 05/2009: 2.8 J	EPTA-Procedure 05/2009: 2.9 J
Capacity	Concrete / Steel / Wood / Core Bit / Diamond Core Bit (Dry Type): 28 / 13 / 32 / 54 / 65 mm (1-1/8" / 1/2" / 1-1/4" / 2-1/8" / 2-9/16")	Concrete / Steel / Wood / Core Bit / Diamond Core Bit (Dry Type): 28 / 13 / 32 / 54 / 65 mm (1-1/8" / 1/2" / 1-1/4" / 2-1/8" / 2-9/16")
Blows Per Minute (BPM)	0 - 5,000	0 - 5,000
No Load Speed (RPM)	0 - 980	0 - 980
Chuck Capacity	1.5 - 13 mm (1/16 - 1/2")	1.5 - 13 mm (1/16 - 1/2")
Sound Pressure Level	95 dB(A)	93 dB(A)
Sound Power Level	106 dB(A)	104 dB(A)
Dimensions (L x W x H)	w/ BL4025: 358x102x232 mm (14-1/8"x4"x9-1/8") w/ BL4040: 373x102x238 mm (14-3/4"x4"x9-3/8")	w/ BL4025: 389x102x232 mm (15-1/4"x4"x9-1/8") w/ BL4040: 404x102x238 mm (15-7/8"x4"x9-3/8")
Net weight	3.9 - 4.6 kg (8.6 - 10.1 lbs.)	HR002G: 4.1 - 4.6 kg (9.0 - 10.1 lbs.) HR004G: 4.0 - 4.5 kg (8.8 - 9.9 lbs.)

\*1 The test results depend to a great extent on the test material etc. 15




photo: HS003G

**Circular Saw**  
**HS003G / HS004G**  
**190 / 185 mm (7-1/2" / 7-1/4")**

**ADT** Automatic torque Drive Technology

automatically changes the cutting speed according to load conditions for an optimum operation:

- On light duty: high-speed rotation mode
- On heavy duty: high torque mode

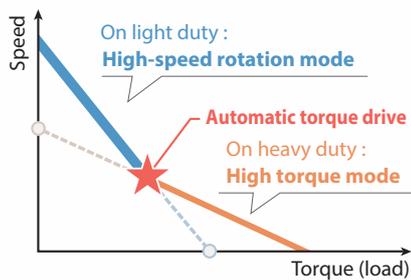

**AWS** Auto-start Wireless System



connects to compatible vacuum cleaner with Bluetooth. The vacuum cleaner automatically runs while the switch is on.



**Bluetooth**

Switch on the tool



Vacuum cleaner is activated

**Compatible with guide rail without adapter (HS004G only)**



**Blower function**



**Twin LED Job light**



**Max. bevel capacity**



**Overload alert using driving mode lamp**





photo: HS004G

**BL MOTOR** **ADT** **AWS** **(BRAKE)** **XPT**



photo: HS003G



photo: HS004G

Work amount on a full battery charge* Battery: BL4040	
about <b>145 pcs</b> Melapi (thickness=60mm / width=300mm)	about <b>310 pcs</b> SPF 2 x 10

Lightweight
<b>4.4 kg</b> Model: HS003G Battery: BL4040

Max cutting capacity at 90°
<b>185mm</b> <b>190mm</b> <b>66 / 68.5 mm</b> Model: HS003G



	HS003G	HS004G
Blade Diameter	190 / 185 mm (7-1/2" / 7-1/4")	190 / 185 mm (7-1/2" / 7-1/4")
Max Cutting Capacity	90°: 68.5 / 66 mm (2-11/16" / 2-5/8") 45°: 47.5 / 45.5 mm (1-7/8" / 1-13/16") 56°: 35.5 / 34 mm (1-3/8" / 1-5/16")	90°: 62.5 / 60 mm (2-7/16" / 2-3/8") 45°: 44.5 / 43 mm (1-3/4" / 1-11/16") 48°: 42 / 41 mm (1-5/8" / 1-5/8")
No Load Speed (RPM)	6,000	6,000
Dimensions (L x W x H)	w/ BL4025: 316x200x290 mm (12-1/2"x7-7/8"x11-3/8") w/ BL4040: 331x200x290 mm (13"x7-7/8"x11-3/8")	w/ BL4025: 322x210x290 mm (12-5/8"x8-1/4"x11-3/8") w/ BL4040: 337x210x290 mm (13-1/4"x8-1/4"x11-3/8")
Net weight	4.1 - 4.4 kg (9.0 - 9.7 lbs.)	4.4 - 4.7 kg (9.7 - 10.4 lbs.)

\*1 The test results depend to a great extent on the test material etc. **17**



**Recipro Saw  
 JR001G**


**High Durable Structure**



Easy blade ejection lever



Smooth cutting with vertical crank system

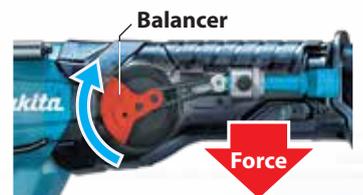

Tool-less shoe adjustment





**BL** MOTOR **XPT**

## High Cutting Speed

Metal Cutting speed about **10% UP**

ø25.4mm (1") Carbon steel pipe

JR001G	<b>110</b>
18Vx2 Predecessor Model	100

Slow Fast

Wood Cutting speed about **35% UP**

SPF 2 x 10

JR001G	<b>135</b>
18Vx2 Predecessor Model	100

Slow Fast

Work amount on a full battery charge*1 Battery: BL4040	
about <b>130 pcs</b> ø25.4mm (1") Carbon steel pipe	about <b>155 pcs</b> SPF 2 x 10

Length of Stroke	32 mm (1-1/4")
Strokes Per Minute (SPM)	High / Low: 0 - 3,000 / 0 - 2,300
Capacity	Pipe : 130 mm (5-1/8") / Wood: 255 mm (10")
Sound Pressure Level	85 dB(A)
Sound Power Level	96 dB(A)
Dimensions (L x W x H)	w/ BL4025: 457x88x233 mm (18"x3-1/2"x9-1/8") w/ BL4040: 472x88x239 mm (18-5/8"x3-1/2"x9-3/8")
Net weight	4.2 - 4.5 kg (9.3 - 9.9 lbs.)

\*1 The test results depend to a great extent on the test material etc. **19**



Twin LED job light



Tool hanger



**Lightweight**

**4.2 kg**

Battery: BL4025



**Makita Singapore Pte Ltd**  
7, Changi South Street 3, Singapore 486348  
Phone : +65-6546-8700 Fax : +65-6546-8711  
Email : msgproductteam@makita.com.sg  
Website : www.makita.com.sg



f MakitaSG



Visit our website

# Makita®

2025/26 (VERSION 1.0)



# NEW LAUNCH

FEATURES / COMING SOON

EXPAND YOUR LITHIUM LINE UP

CXT

LXT

XGT



# HS013G

## Cordless Circular Saw

Blade diameter  
**415 mm**

### HS013GZ 415 mm (16-5/16") Cordless Circular Saw

**New**

High-power cutting of 6x timbers

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



No load speed Saw blade	2,100 min <sup>-1</sup> Type: TCT saw blade / 35T, Diameter: 415 mm (16-5/16")
Max cutting capacity	0°: 158 mm (6-1/4"), 45°: 106 mm (4-3/16")
Dimensions (L x W x H)	606 x 233 x 476 mm (23-7/8 x 9-1/8 x 18-3/4")
Net weight	11.0 - 12.0 kg (24.3 - 26.5 lbs.)

40Vmax



TCT saw blade, Hex wrench, Joint, Protect stand, Battery, Charger,  
Z: Battery and Charger are sold separately

- The largest cordless circular saw in the world (As of August 2024)
- Comfortable cutting of thick materials with the high power similar to corded models
- Max cutting capacity: 158mm
- Auto-start Wireless System (AWS) connects to compatible vacuum cleaners with Bluetooth
- Bevel capacity: 0 - 45 degrees, right-side saw blade position



# RP001G

## Cordless Router

Net weight  
**4.0 kg**  
(with BL4025)

Overall height  
Lower dead point  
**228 mm**  
(with BL4025)



- Excellent combination of high efficiency and lightweight design
- Compatible with a 1/2" collet chuck, 1,900 W Variable Speed Plunge Router
- Ergonomically designed Knob style handles for comfortable operation
- Auto-start wireless system (AWS)
- Variable speed control by dial



### RP001GZ 12mm (1/2") Cordless Router

**New**

High power and Compatibility with 12mm Collet chuck

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Collet size	12 mm / - (- / 1/2")
Plunge Capacity	0-60 mm (0-2-3/8")
Base diameter	150 x 130 mm (5-7/8 x 5-1/8")
No Load Speed (RPM)	8,000-25,000 min <sup>-1</sup>
Dimensions (L x W x H)	w/ BL4025: 135 x 275 x 288 mm (5- 5/16 x 10-7/8 x 11-3/8")
Net weight	4.0-5.2 kg (8.8-11.5 lbs.)

40Vmax



Wrench, Collet sleeve, Templet guide, Dust nozzle, Holder, Rod, Chip deflector, Battery, Charger, Spanner,  
Z: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



# UB002G

## Cordless Blower

Max air volume  
**3.6 m<sup>3</sup>/min**

Battery: BL4040F / without nozzle



With the standard nozzle

- Maximum air volume of 3.6 m<sup>3</sup>/min
- Maximum air velocity of 99 m/s with the standard nozzle
- Compact and lightweight for single handed operation
- 3 air volume setting (high/medium/low)
- Variable speed control dial enables user to match the speed to the application for greater versatility
- Compatible with various nozzle accessories for increased versatility



For clearing pathways

### UB002GZ Cordless Blower

**New**

40Vmax XGT Cordless Variable 3-Speed Blower

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



No load speed	0 - 18,000 min <sup>-1</sup>
Blowing force	Blower: 3.1 - 3.2 N
Max air volume	Blower: 3.5 - 3.6 m <sup>3</sup> /min Vacuum: 2.0 m <sup>3</sup> /min
Max air velocity	Blower: 98 - 99 m/s
Max sealed suction	Vacuum: 5.4 kPa
Continuous use	Blower, High / Med. / Low: 20 / 60 / 120 min. Vacuum: 19 min.
Dimensions (L x W x H)	515 x 156 x 227 mm (20-1/4 x 6-1/8 x 8-15/16")
Net weight	2.0 - 3.5 kg (4.4 - 7.7 lbs.)

40Vmax 1

Nozzle, Dust bag, Battery, Charger, Z: Battery and Charger are sold separately

# CL004G

## Cordless Cleaner

Max sealed suction  
**20 kPa**

Highly durable professional-grade nozzle



### CL004GZ Cordless Cleaner

**New**

4-Speed Cleaner with LED Light, Cyclone System, Electric Rotary Brush

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Capacity	250 mL (8.5 oz)
Continuous use	w/ BL4025, Mode 1 / 2 / 3 / 4: 60 / 40 / 20 / 14 min
Max air flow	1.0 m <sup>3</sup> /min
Max sealed suction	20 kPa (2,000 mmH <sub>2</sub> O)
Suction power	w/ Easy shake off filter, Mode 1 / 2 / 3 / 4: 20 / 40 / 70 / 110 W
Noise level	Mode 1 / 2 / 3 / 4: 54 / 59 / 62 / 65 dB(A)
Dimensions (L x W x H)	w/ Pipe & Nozzle, w/ BL4025: 1,094 x 243 x 186 mm (43 x 9-9/16 x 7-3/8")
Net weight	1.6 - 2.2 kg (3.5 - 4.9 lbs.)

40Vmax

Nozzle assembly, Pipe assembly, Sash nozzle, Nozzle holder, Easy shake off filter, Battery, Charger, Motorized brush nozzle, Z: Battery and Charger are sold separately

- Switch: one touch push button
- Dust collection system: Cyclone type
- 4-mode suction power selection with mode memory function
- Maximum suction power of 110W with a low noise level of 66 dB(A) in maximum mode
- The electric rotary brush can be attached and detached without tools, making maintenance easy
- A high-speed brushless motor optimized for cordless cleaner



Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



# TW011G

Cordless Impact Wrench



# DTW1005

Cordless Impact Wrench



## TW011GZ 19mm (3/4") Cordless Impact Wrench

New

1,500 N-m (1,110 ft.lbs.) Impact Wrench, Reverse Rotation Auto Stop Mode

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Square Drive	19.0 mm (3/4")
Max Fastening Torque	1,500 N-m (1,110 ft.lbs.)
Nut-busting torque	1,900 N-m (1,400 ft.lbs.)
No Load Speed (RPM)	Max / Hard / Med / Soft: 0 - 1,800 / 0 - 1,100 / 0 - 700 / 0 - 500 min <sup>-1</sup>
Impacts Per Minute (IPM)	Max / Hard / Med / Soft: 0 - 2,600 / 0 - 2,000 / 0 - 1,400 / N/A - N/A min <sup>-1</sup>
Dimensions (L x W x H)	w/ BL4025: 329 x 94 x 297 mm (13 x 3-11/16 x 11-3/4")
Net weight	4.3 - 5.5 kg (9.5 - 12.1 lbs.)

40Vmax



Hook, Battery, Charger, Tool bag, Z: Battery and Charger are sold separately

## DTW1005Z 19mm (3/4") Cordless Impact Wrench

New

With a 137mm (5-3/8") long anvil with a 19mm (3/4") square drive

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Square Drive	19.0 mm (3/4")
Max Fastening Torque	1,360 N-m (1,000 ft.lbs.)
Nut-busting torque	1,700 N-m (1,250 ft.lbs.)
No Load Speed (RPM)	Max / Hard / Med / Soft: 0 - 1,800 / 0 - 1,000 / 0 - 900 / 0 - 800 min <sup>-1</sup>
Impacts Per Minute (IPM)	Max / Hard / Med / Soft: 0 - 2,200 / 0 - 1,800 / 0 - 1,600 / N/A - N/A min <sup>-1</sup>
Dimensions (L x W x H)	w/ BL1860B: 339 x 91 x 291 mm (13-3/8 x 3-5/8 x 11-1/2")
Net weight	3.9 - 4.2 kg (8.6 - 9.3 lbs.)

18V



Hook, Battery, Charger, Tool bag, Z: Battery and Charger are sold separately



- Long anvil with 19mm (3/4") Square drive
- Style of socket retention: C ring (with a hole)
- Electronic 4-stage impact power selection
- Constant speed control
- TW011G delivers up to 1,500 N-m fastening and 1,900 N-m nut-busting torque
- DTW1005 delivers up to 1,360 N-m fastening and 1,700 N-m nut-busting torque
- Mode settings suitable for tire removal and installation
- Ensures stable torque until the end of the battery capacity with constant speed control
- High water-resistance compatible with XPT

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



# DDF490

Cordless Impact Wrench



# DHP490

Cordless Impact Wrench



## DDF490RF / Z 13mm (1/2") Cordless Driver Drill

**New**

18V LXT Brushless Cordless 13 mm (1/2") 65 N·m (580 in.lbs) Driver Drill

Li-ion Ah 6.0 5.0 3.0 1.5



Capacity	Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
Chuck Capacity	13 mm (1/2")
Max torque	65 N·m (580 in.lbs)
No Load Speed (RPM)	High: 0 - 1,900 Low: 0 - 500
Max Fastening Torque	Hard / Soft: 50 / 27 N·m
Dimensions (L x W x H)	167 x 81 x 237 mm (6-9/16 x 3-3/16 x 9-3/8")
Net weight	1.4 - 1.7 kg (3.1 - 3.7 lbs.)

18V



LXT BL XPT

Hand strap, Battery, Charger, Z: Battery and Charger are sold separately

- 13 mm (1/2") keyless chuck for quick and easy bit changes
- 20-stage torque adjustment
- Delivers up to 65 N·m (580 in.lbs) of torque and speeds of up to 1,900 rpm
- LED work light with pre-glow and after-glow
- Battery protection circuit to prevent overload, over-discharge, and overheating
- Reversing switch and belt hook for added convenience
- Ergonomic soft grip for comfort during extended use
- Drilling into concrete, brick, metal, wood, and all screwdriving jobs
- For DHP490: Three action modes are available: Drilling, Hammer drilling, and Screwdriving

## DHP490RF / RFX1 / Z 3mm (1/2") Cordless Hammer Driver Drill

**New**

Provides increased efficiency with the maximum no-load speed of up to 1,900 rpm.

Li-ion Ah 6.0 5.0 3.0 1.5




Capacity	Masonry: 13 mm (1/2") Steel: 13 mm (1/2") Wood: 38 mm (1-1/2")
Impacts per minute	High: 0 - 28,500 min <sup>-1</sup> Low: 0 - 7,500 min <sup>-1</sup>
Chuck Capacity	13 mm (1/2")
Max torque	65 N·m (580 in.lbs)
No Load Speed (RPM)	High: 0 - 1,900 Low: 0 - 500
Max Fastening Torque	Hard / Soft: 50 / 27 N·m
Dimensions (L x W x H)	172 x 81 x 237 mm (6-3/4 x 3-3/16 x 9-3/8")
Net weight	1.4 - 1.7 kg (3.1 - 3.7 lbs.)

18V



LXT BL XPT

Hand strap, Battery, Charger, Z: Battery and Charger are sold separately

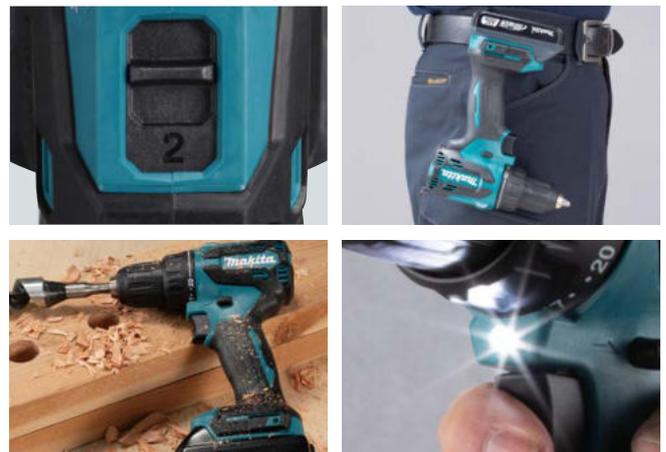

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



# DTC104

## Cordless Cable Cutter



- With a maximum cutting capacity of 105 mm, the tool is capable of cutting large-diameter electric wires
- Cutting capacity: Polyethylene power cable:  $\varnothing 72$  mm ( $4 \times 325$  mm<sup>2</sup>), PVC insulated multi-core cable:  $\varnothing 77$  mm ( $3 \times 325$  mm<sup>2</sup>), Annealed copper wire:  $\varnothing 105$  mm (1,300 mm<sup>2</sup>), Hard-drawn copper wire:  $\varnothing 90$  mm (1,300 mm<sup>2</sup>), Aluminum wire:  $\varnothing 105$  mm (1,300 mm<sup>2</sup>)
- Automatic reverse function
- Single LED job light with afterglow function



### DTC104ZK Cordless Cable Cutter

**New**

The tool is capable of cutting large-diameter electric wires

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5

Max blade opening width 105 mm (4-1/8")  
 Max cable cutting capacity Polyethylene power cable:  $\varnothing 72$  mm ( $4 \times 325$  mm<sup>2</sup>), PVC insulated multi-core cable:  $\varnothing 77$  mm ( $3 \times 325$  mm<sup>2</sup>), Annealed copper wire:  $\varnothing 105$  mm (1,300 mm<sup>2</sup>), Hard-drawn copper wire:  $\varnothing 90$  mm (1,300 mm<sup>2</sup>), Aluminum wire:  $\varnothing 105$  mm (1,300 mm<sup>2</sup>)



Dimensions (L x W x H) w/ BL1860B: 718 x 123 x 267 mm (28-1/4 x 4-7/8 x 10-1/2")  
 Net weight 10.2 - 10.5 kg (22.5 - 23.1 lbs.)

18V

Z: Battery and Charger are sold separately

# DTC301

## Cordless Crimper



- With a maximum crimping capacity of  $\varnothing 19.5$  mm (300 mm<sup>2</sup>), this tool is capable of crimping terminals onto large-diameter electric wires
- Crimping capacity: Cu:  $\varnothing 19.5$  mm (300 mm<sup>2</sup>), Al:  $\varnothing 19.5$  mm (300 mm<sup>2</sup>)
- Auto retract function, Single LED job light with afterglow function
- Trigger-lock function to minimize accidental pulling of the switch trigger



### DTC301ZK Cordless Crimper

**New**

Capable of crimping terminals onto large-diameter electric wires

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5

Output force 120 kN  
 Ram stroke length 31 mm (1-1/4")  
 Crimping capacity Cu:  $\varnothing 19.5$  mm (300 mm<sup>2</sup>)  
 Al:  $\varnothing 19.5$  mm (300 mm<sup>2</sup>)  
 Dimensions (L x W x H) W / BL1860B: 415 x 92 x 346 mm (16-3/8 x 3-5/8 x 13-5/8")  
 Net weight 6.8 - 7.1 kg (15.0 - 15.7 lbs.)



18V

Z: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



# DHW180

## Cordless Pressure Washer

Regular pressure

# 2.4 MPa

In High mode, when connected to water supply

- Providing sufficient cleaning power for light-duty washing tasks on work sites and for home use
- Selectable from two power modes
- 5-in-1 nozzle allows for easy mode changes by rotating the nozzle head
- Self priming function
- Water-resistance compatible with XPT
- Battery capacity warning function



### DHW180Z01 Cordless Pressure Washer

**New**

18V LXT Cordless 2.4 MPa Pressure Washer

Li-ion Ah 6.0 5.0 3.0 1.5

Regular pressure	Self-priming, High / Low: 2.0 / 0.8 Mpa Connection to water supply, High / Low: 2.4 / 0.8 Mpa
Regular flow rate	Self-priming, High / Low: 2.5 / 1.5 L/min Connection to water supply, High / Low: 2.5 / 1.5 L/min
Max Flow Rate	w/o Nozzle: 5.3 L/min
Continuous use	High, Low: 18, 50min.
Max suction height	2.0m (6.7 ft)
Supplied hose length	6m (19.7 ft)
Dimensions (L x W x H)	419 x 99 x 239 mm (16-1/2 x 3-7/8 x 9-3/8")
Net weight	2.3 - 2.7 kg (5.1 - 6.0 lbs.)



18V LXT XPT

Hose, Absorption connector, Nozzle, Extension, Cleaner pin, Battery, Charger, Z: Battery and Charger are sold separately

# DJV186

## Cordless Jig Saw



- Top Handle Jig Saw, 3 Orbital Settings plus Straight Cutting
- 3 orbital settings plus straight cutting deliver faster and more accurate cuts
- Variable speed control
- Compact and lightweight
- Electric brake
- Blower function



Optional accessories Support base set



### DJV186RT1J / Z Cordless Jig Saw

**New**

18V LXT Cordless Top Handle Jig Saw, 3 Orbital Settings plus Straight Cutting

Li-ion Ah 6.0 5.0 3.0 1.5

Capacity	Wood: 65 mm (2-9/16") Mild steel: 6 mm (1/4") Aluminum: 10 mm (3/8")
Bevel range	0 - 45°
Length of Stroke	18 mm (11/16")
Strokes Per Minute (SPM)	0 - 2,900 min <sup>-1</sup>
Dimensions (L x W x H)	257 x 81 x 196 mm (10-1/8 x 3-3/16 x 7-3/4")
Net weight	1.9 - 2.2 kg (4.2 - 4.9 lbs.)



18V LXT

Jig saw blade, Hex wrench, Battery, Charger, Blade, Z: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



## BCC01 / BCC02

### Battery Charging Case

- Designed to be connected to MAKPAC carriers
- Can be carried to the site by the MAKPAC trolley or cart
- Switch charging of batteries attached to multiple ports
- LXT batteries can be charged using an interchangeable adapter the ADP10 (BCC01 only)
- Hole for padlock
- Rotatable twin handles
- Charging status indicator
- Removable lid and vertical or horizontal case placing



### BCC01: 8 ports



MAKPAC type Battery Charging Case with multiple charging ports for LXT batteries

### BCC02: 12 ports



MAKPAC type Battery Charging Case with multiple charging ports for XGT batteries

## 1914X3-8

### Dust Extraction Pad Set

- Wall suction dust extraction shroud for all Makita rotary and combination hammers
- Facilitates efficient dust extraction for cleaner and healthier working environments
- Suction control lever allows easy adjustment of suction force and change of working position
- Bit diameter with shroud on: Up to 30mm
- Bit diameter with shroud off: Up to 52mm
- Vacuum connection: 38mm and 24mm outer cuff diameter
- Includes 2x shroud replacements



## 1914L7-6 / 1914L9-2

### Dust Cup Set for HR2670

- Dust collection attachment to be attached to the tip of the tool and used in conjunction with a vacuum cleaner
- Items can be a dust collection attachment in which can be attached to the tip of the tool and used in conjunction with a vacuum cleaner of cuff size 22



1914L7-6 for drilling work



1914L9-2 for chiseling work



Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



**Makita**<sup>®</sup>



**COMING  
SOON**

Visit us at:  
[www.makita.com.sg](http://www.makita.com.sg)



 MakitaSG

# Makita®

2025/26 (VERSION 2.0)



# NEW LAUNCH

FEATURES / COMING SOON

EXPAND YOUR LITHIUM LINE UP





# VC014GL

## Cordless Vacuum Cleaner (Wet & Dry)

TANK CAPACITY  
FOR WET DEBRIS  
**4.5L**

### VC014GLZ Cordless Vacuum Cleaner

New

Cordless 7.5 L Dust Class L HEPA Portable Vacuum Cleaner (Wet & Dry)

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	Dry / Wet: 7.5 / 4.5 L
Continuous Use (min.)	w/ BL4050F: 22 - 120 min.
Air volume	1.0 - 2.0 m <sup>3</sup> /min
Max Sealed Suction	4.5 - 15 kPa
Suction Power	25 - 165 W
Dimensions (L x W x H)	400 x 251 x 282 mm (15-3/4 x 9-7/8 x 11-1/8")
Net weight	5.0 - 6.2 kg (11.0 - 13.7 lbs.)

40Vmax



Hose complete, Wide nozzle, Sash nozzle, Shoulder belt, Paper filter, Paper filter set, Wet filter, Battery, Charger, Z: Battery and Charger are sold separately

- Powered by a 40Vmax XGT Li-Ion battery
- 7.5 L Dust Class L HEPA Portable Vacuum Cleaner (Wet & Dry)
- Maximum suction power of 165 W (with a ø28mm x 2m flexible hose attached)
- Provides a runtime of up to 120 minutes with a BL4050F battery
- The tank capacity of 7.5 L for dry dust and 4.5 L for wet debris
- The HEPA filter effectively captures very fine particles



# JR003G

## Cordless Recipro Saw



- Capable of cutting large-diameter pipe
- Delivers excellent cutting efficiency through the use of an XGT battery, a load-resistant BL motor, and enhanced stroke rate
- Enhanced structural rigidity around the crank mechanism
- Capable of cutting pipes with an outer diameter of up to 220 mm
- Adjustable stroke rate from 800 to 2,200 min<sup>-1</sup> with a dial improves cutting efficiency and extends blade life

### JR003GZ 26 mm (1") Cordless Recipro Saw

New

40Vmax XGT BL Cordless Recipro Saw, Chain Vise

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Max cutting diameter	ø220 mm (8-5/8")
Length of Stroke	26 mm (1")
Strokes Per Minut	0 - 2,200 min <sup>-1</sup>
Speed adjustment	800 - 2,200
Dimensions (L x W x H)	w/ BL4040: 583 x 103 x 152 mm (23 x 4-1/16 x 6")
Net weight	4.5 - 6.8 kg (9.9 - 15.0 lbs.)



40Vmax



Hex wrench, Hex socket head bolt, Recipro saw blade set for use with chain vise, Vise assembly, Front grip, Grip shaft, Battery, Charger, Blade, Z: Battery and Charger are sold separately



Maximum cutting diameter  
**220 mm**

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



# HG001G

## Cordless Heat Gun



### HG001GZ02 Cordless Heat Gun

**New**

Max 600 degrees Celsius air temperature for a wide range of cordless works

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Air Temperature (°C)	Ambient temperature (blowing) - 600 °C (1,112.0 °F)
Air volume	120 / 150 / 180 / 200 L/min
Continuous use	w/ BL4040: 14 min.
Dimensions (L x W x H)	191 x 86 x 272 mm (7-1/2 x 3-3/8 x 10-3/4")
Net weight	1.5 - 2.7 kg (3.3 - 6.0 lbs.)

40Vmax



Reduction nozzle, Glass protection nozzle, Reflector nozzle, Wide slot nozzle, Battery, Charger, Z: Battery and Charger are sold separately

- A maximum temperature of 600°C and air volume of 200 L/min for fast PVC welding and efficient shrinking of thick cables
- LCD screen with backlight
- The quick-release mechanism allows tool-free nozzle removal without touching hot metal parts
- Memory and maximum temperature control functions
- Compatible with existing nozzles for our DC and AC models, offering greater versatility



# UC030G

## Cordless Chain Saw



Max. chain speed  
**29.0 m/s**

- Fast acceleration in response to trigger operation enables smooth, continuous cutting tasks like limbing
- Selectable chain speeds (ECO/Medium/High) with variable speed control by trigger and a mode memory function
- When excessive force is applied, the tool slows down, making it easy to adjust the load on the cutting edge
- IPX4M-rated for use in rainy conditions
- A shorter distance between the handle and hand guard



### UC030GZ 400, 450, 500mm (16, 18, 20") Cordless Chain Saw

**New**

40Vmax XGT BL Brushless Cordless Chain Saw

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Guide Bar Length	400, 450, 500 mm (16, 18, 20")
Chain Pitch	0.325"
Chain Gauge	1.3 / 1.6 mm (0.05 / 0.063")
Chain Speed	0 - 20.0, 24.5, 29.0 m/s
Chain Oil Tank Volume	260 mL (8.8 US oz)
Dimensions (L x W x H)	w/o Guide bar, Saw chain: 449 x 232 x 280 mm (17-3/4 x 9-1/8 x 11")
Net weight	BL4040F - BL4080F: 6.6 - 7.8 kg (14.6 - 17.2 lbs.)

40Vmax



XGT BL XPT

1

Guide bar, Saw chain, Guide bar case, Wrench, Chain oil, Round file, Battery, Charger, Z: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



# GP001G

## Cordless Grease Gun



### GP001GZ Cordless Grease Gun

New

40Vmax XGT, delivers up to 69 MPa (10,000 PSI) of max pressure

Li-ion Ah 5.0 4.0 2.5 2.0



Max operating pressure	69 MPa (10,000 PSI)
Flow rate	First speed: 145 mL/min (5.0 oz/min) Second speed: 220 mL/min (7.5 oz/min) Third speed: 290 mL/min (10.0 oz/min) Fourth speed: 350 mL/min (12.0 oz/min)
Grease capacity w/ Barrel A	Cartridge / Bulk: 410 / 455 g (14.5 / 16.0 oz)
Flexible hose length	1,200 mm (47-1/4")
Dimensions (L x W x H)	395 x 112 x 245 mm (15-1/2 x 4-3/8 x 9-5/8")
Net weight	5.1 - 6.5 kg (11.2 - 14.3 lbs.)

40Vmax



Shoulder Strap, Battery, Charger, Z: Battery and Charger are sold separately

- Stable discharge even under high-pressure operation
- Maintaining the same maximum discharge pressure of 69 MPa
- Air lock detection function
- Constant speed control for stable discharge operation
- Easier bellows cartridge replacement with an improved housing design
- Reduced air lock frequency during cartridge replacement by shortening the grease flow path



# GD001G / GD002G

## Cordless Die Grinder



- 8 mm (1/4") Die Grinder
- Delivers high work efficiency and high durability.
- Equipped with a shaft lock, LED light, and other features for significantly improved usability compared with DGD800
- Ergonomically designed slim grip
- Active Feedback sensing Technology (AFT)
- High rotation speed: Deburring, grinding, Low rotation speed: Finish polishing, Removal of paint and rust

### GD001GZ / GD002GZ 8mm Cordless Die Grinder

New

40Vmax XGT Li-Ion Cordless 8 mm (1/4") Die Grinder

Li-ion Ah 8.0 5.0 4.0 2.5 2.0



Capacity	Collet: 8 mm (5/16")
Wheel Diameter	52 mm (2-1/16")
No Load Speed (RPM)	7,000 - 29,000 min <sup>-1</sup>
Circumference of grip portion	146 mm (5-3/4")
Dimensions (L x W x H)	452 x 85 x 119 mm (17-3/4 x 3-3/8 x 4-11/16")
Net weight	2.2 - 3.4 kg (4.9 - 7.5 lbs.)

40Vmax



Wrench, Z: Battery and Charger are sold separately.

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



# GA056G

## Cordless Flat-head Angle Grinder

Tip access angle

# 39°

\* with 4 mm thick offset wheel

- Equipped with a newly designed tool-less wheel cover for flat-head angle grinders, allowing access at angles as small as 39°
- Paddle Switch, and using high voltage 40Vmax XGT Li-Ion battery and BL motor
- Delivering high operation efficiency even in work at recessed corners such as removal of weld marks on steel frame joints of narrow, acute angle
- Active Feedback sensing Technology (AFT) and Electric brake for maximum productivity



### GA056GZ 125mm (5") Cordless Flat-head Angle Grinder

**New**

Flat-Head Angle Grinder, Anti-Restart Function, Electric Brake, Paddle Switch

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Wheel Diameter	125 mm (5")
Minimum access angle	39°
No Load Speed (RPM)	3,000 - 9,000 min <sup>-1</sup>
Cutting depth	30 mm (1-3/16")
Dimensions (L x W x H)	483 x 140 x 136 mm (19 x 5-1/2 x 5-3/8")
Net weight	3.1 - 4.4 kg (6.8 - 9.7 lbs.)



40Vmax



**XGT BL AFT XPT**

Side grip, Adapter, Lock nut wrench, Wheel cover for cut-off wheel, Battery, Charger, Z: Battery and Charger are sold separately

# TR001GZ

## Cordless Rebar Tying Tool

- Capable of tying a wide range of rebar sizes, from small to large diameters
- Dual BL motors for twisting and feeding ensure stable tying with 1.6 mm wire
- One-step wire reel loading is enabled by a linked cover and gear mechanism
- Tying strength - D10 x D10 rebar: approx. 300% increase, D22 x D22 rebar: approx. 200% increase



### TR001GZ Cordless Rebar Tying Tool

**New**

Capable of tying a wide range of rebar sizes, from small to large diameters

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Tie Wire	Annealed wire: 16Ga (1.6 mm) D10 x D10 - (D16 x 2) x (D16 x 2)
Applicable Rebars	D10 x D10: 305 % D22 x D22: 200 %
Tying strength	D10 x D10: 305 % D22 x D22: 200 %
Nose width	5.6 mm (7/32")
Dimensions (L x W x H)	w/ BL4040: 375 x 113 x 331 mm (14-3/4 x 4-7/16 x 13")
Net weight	3.3 - 4.5 kg (7.3 - 9.9 lbs.)



40Vmax



**XGT BL XPT**

Oil supply, Battery, Charger, Z: Battery and Charger are sold separately

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



# DTL302

## Cordless Angle Impact Wrench



### DTL302Z 9.5mm (3/8") Cordless Angle Impact Wrench New

18V LXT, High torque is achieved by increasing hammer inertia

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Max fastening torque	310 - 340 N·m
Nut-busting torque	500 - 530 N·m
Square drive	9.5 mm (3/8")
No Load Speed (RPM)	Hard / Med. / Soft: 0 - 3,200 / 0 - 1,500 / 0 - 1,000 min <sup>-1</sup>
Impacts Per Minute (IPM)	Hard / Med. / Soft: 0 - 4,000 / 0 - 2,800 / 0 - 1,800 min <sup>-1</sup>
Head height	78.0 mm (3-1/16")
Dimensions (L x W x H)	396 - 414 x 80 x 86 - 92mm (15-5/8 - 16-1/4 x 3-1/8 x 3-3/8 - 3-5/8")
Net weight	1.8 - 2.1 kg (4.0 - 4.6 lbs.)

18V

Z: Battery and Charger are sold separately

- Developed targeted at work in tight spaces such as automobile and agricultural machinery maintenance
- Drive size: 9.5mm (3/8") Square, C ring (without hole)
- High torque is achieved by increasing hammer inertia, resulting in higher performance than competitors' models
- LED job light (3 stages brightness), Slim tool head, excellent maneuverability
- Equipped with an automatic impact stop system in forward/reverse rotation mode



## Offset Diamond Wheel

### Masonry Works for 100mm (4") and 125mm (5") Grinder

- Improved cost performance compared to the current product (one star range)
- Three types of blades are available to meet a variety of user needs (Single, Double, Turbo)
- Features like SJS, SJS II, or Soft Start—these help reduce starting stress and protect the grinder's gearing
- Perfect for professional use on construction sites



#### OFFSET DIAMOND WHEEL 100 X 16mm (4")

D-80547



Rough / SGL

D-80581



Standard / DBL

D-80628



Fine / Turbo

#### OFFSET DIAMOND WHEEL 125 X 22.23mm (5")

D-80569



Rough / SGL

D-80606



Standard / DBL

D-80640



Fine / Turbo

Items of standard equipment and specifications may vary by country or area. Net weight and dimensions may differ by the type of battery.



**Makita**<sup>®</sup>



**COMING  
SOON**

Visit us at:  
[www.makita.com.sg](http://www.makita.com.sg)



 MakitaSG

2024/25 (VERSION 1.0)

# Makita®

## NEW LAUNCH

FEATURES / COMING SOON



EXPAND YOUR LITHIUM LINE UP

# HM004G

## Cordless Breaker

Impact energy  
**72.8**  
Joule



- Maximum drilling capacity of 20 mm
- Drilling speed about 2.3 times compared to 18V model
- Built-in LED light with preglow and afterglow functions
- With 3-mode operation for "Rotation Only", "Hammering with Rotation" or "Hammering Only"
- AVT reduces load during continuous drilling operations
- Compatible with compact and lightweight new dust collection system DX16



### HM004GZ05 Cordless Breaker

**New**

40Vmax X2 (80Vmax) XGT BL, 72.8 J Cordless Breaker, 28.6 mm Hex Shank

Li-Ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Impact Energy	EPTA-Procedure 05/2009: 72.8 J (53.7 ft.lbs.)
Blows Per Minute (BPM)	870
Max Output	4,400 W
Shank Diameter	28.6 mm (1-1/8")
Shank type	Hammer: 28.6mm Hex Shank
Dimensions (L x W x H)	882 x 227 x 540 mm (34- 3/4 x 8-15/16 x 21-1/4")
Net weight	30 - 32.4 kg (66.1 - 71.4 lbs.)



40Vmax x2



Hex wrench, Bull point, Dust extractor attachment, Wireless unit set, Z: Battery and Charger are sold separately

# WT001G

## Cordless Shear Wrench

Max. Torque  
shear bolt  
capacity  
**M22**



- Powered by 40Vmax XGT Li-Ion battery / BL motor
- Compatible bolt size: M16 (5/8"), M20 (3/4"), M22 (7/8")
- Work amount: approx. 250 pcs of M22 Torque shear bolt with BL4040
- High fastening speed similar to that of our cordless model DWT310
- Large work amount
- Battery capacity warning lamp



### WT001GZ Cordless Shear Wrench

**New**

40Vmax XGT BL Brushless Cordless 804 N-m (593 ft.lbs.) Shear Wrench

Li-Ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Capacity	High strength torque shear bolt (HTB): M16, M20, M22 (5/8, 3/4, 7/8")
No Load Speed (RPM)	17 min <sup>-1</sup>
Max Fastening Torque	804 N-m (593 ft.lbs.)
Sound Power Level	82 dB(A)
Dimensions (L x W x H)	w/ M22 Sleeve, w/ BL4040: 270 x 95 x 340 mm (10-5/8 x 3-3/4 x 13-3/8")
Net weight	5.2 - 5.9 kg (11.5 - 13 lbs.)



40Vmax



Screwdriver, Shoulder belt, Outer sleeve, Inner sleeve, Battery, Charger,  
Z: Battery and Charger are sold separately

# VS001G

## Cordless Vacuum Sweeper



Dust container capacity  
**24 L**

- Designed mainly for use in construction sites or outdoor commercial facilities
- Cleaning width with side brush: 650mm
- Excellent transportability and maneuverability
- Two main brushes located at the bottom of the machine enable cleaning of small dust particles as well as large debris
- Allows installation of MAKPAC or Portable power pack
- Equipped with a carry handle for easy carrying



### VS001GZ Cordless Vacuum Sweeper

**New**

40Vmax XGT BL Cordless 24 L Dust Class HEPA Vacuum Sweeper

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Dust container capacity	24 L (6.3 gal)
Continuous use (approx.) on a full battery charge	w/ BL4080F x2: 150 min
Charging time approx.	w/ BL4080F x2, w/ DC40RA: 120 min
Sweeping capacity	2,600 m <sup>2</sup> /h
Cleaning width	Main brush: 480 mm (18-7/8"), Side brush: 650 mm (25-1/2")
Dimensions (L x W x H)	w/ Handle in upright position: 830 x 677 x 1,146 mm (32-3/4 x 26-3/4 x 45")
Net weight	31-34 kg (68.3-74.9 lbs.)

40Vmax



XGT BL XPT HEPA filter

Battery, Charger, Z: Battery and Charger are sold separately

# UN001G

## Cordless Pole Hedge Trimmer



Maximum cutting diameter  
**20 mm**

- Powered by a 40Vmax XGT Li-Ion battery, designed to be lightweight and capable of cutting thick branches
- Three-facet obliquely ground blade
- High water-resistance compatible with XPT / IPX4
- Lubrication is possible with a grease gun
- 3-speed design for optimum speed control
- Angle adjustable hedge trimmer head; 45° tilt-up to 70° tilt-down from the horizontal position



### UN001GZ 600mm (23-5/8") Cordless Pole Hedge Trimmer

**New**

40Vmax XGT BL Brushless Cordless Pole Hedge Trimmer

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Blade Length	600 mm (23-5/8")
Max Cutting Capacity	25 mm (1")
No load speed	High / Med / Low: 2,000 / 1,500 / 1,000
Strokes Per Minute (SPM)	High / Med / Low: 4,000 / 3,000 / 2,000
Cycles per minute (CPM)	High / Med / Low: 2,000 / 1,500 / 1,000
Continuous use	w/ BL4040F, High: 65min
Dimensions (L x W x H)	2,268 x 100 x 148 mm (89-1/2 x 3-15/16 x 5-7/8")
Net weight	4.7 - 5.9 kg

40Vmax



XGT BL XPT

Blade cover, Shoulder harness, Battery, Charger, Z: Battery and Charger are sold separately

## TM001G

Cordless Multi Tool



- STARLOCK MAX compatibility enables heavy-duty applications such as cutting rebars
- BL motor delivers higher cutting/sanding efficiency
- 3.6° oscillation angle engineered for faster, more aggressive cutting and sanding
- 12 angle settings at every 30° from 0° to 360°
- Soft start feature for smooth start-ups
- Tool-less clamp system for fast accessory installation



### TM001GZ01 Cordless Multi Tool

**New**

Compatible with STARLOCK / STARLOCK PLUS / STARLOCK MAX

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Oscillations Per Minute (OPM)	10,000 - 20,000 min <sup>-1</sup>
Oscillation Angle	3.6°
Circumference of grip portion (6-5/8")	169 mm
Dimensions (L x W x H) w/ BL4025:	326 x 91.5 x 123 mm (12-7/8 x 3-5/8 x 4-7/8")
Net weight	2.1 - 3.3 kg (4.6 - 7.3 lbs.)



**40Vmax**



Oscillating multi tool accessories, Dust attachment, Tool box, Battery, Charger, Blade, Z: Battery and Charger are sold separately

## UH020G

Cordless Hedge Trimmer



- Smooth and efficient trimming
- XPT / IPX4-compatible
- Reverse function to clear jams
- The guide bar is made of aluminum, making the front of the tool lighter and reducing user fatigue
- Anti-vibration structure by double-layered housing
- The switch lever is easy-to-press without deeply gripping the front handle, allowing for easy on/off control



### UH020GZ 500mm (19-3/4") Cordless Hedge Trimmer

**New**

40Vmax XGT BL Brushless Cordless 50 cm (19-3/4") Hedge Trimmer

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Blade Length	500 mm (19-3/4")
Tooth Spacing	30.0 mm (1-3/16")
Max branch diameter	20.0 mm (13/16")
Strokes Per Minute (SPM)	4,200 min <sup>-1</sup>
Continuous use	w/BL4040:110 min
Vibration Level	2.5 m/s <sup>2</sup> or less
Dimensions (L x W x H)	w/BL4040: 929 x 207 x 185 mm (36-1/2 x 8-1/8 x 7-1/4")
Net weight	3.0 - 4.2 kg (6.6 - 9.3 lbs.)



**40Vmax**



Blade cover, Chip receiver, Battery, Charger, Easy shake off filter, Z: Battery and Charger are sold separately


**BO001CG**  
Battery Powered  
Random Orbit Sander



**BO003CG**  
Battery Powered  
Random Orbit Sander



**BO006CG**  
Battery Powered  
Orbital Sander

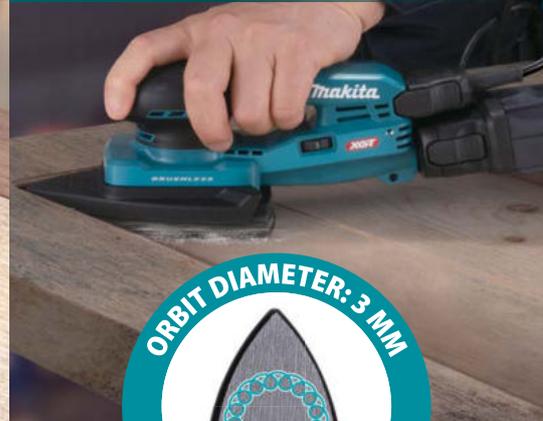

Low overall height


**-57 mm**



Overall height  
**-57 mm**



Battery adapter set

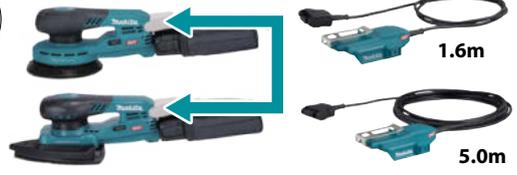

**BO001CGZ** Battery Powered Random Orbit Sander

**New**

Designed to be lightweight with the connector-style connection to the battery

Orbit diameter	5.0 mm (3/16")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	6,000-10,000 min <sup>-1</sup>
Abrasive disc fastening system	Hook & loop
Sound pressure level	78 dB(A)
Vibration level	3.2 m/s <sup>2</sup>
Dimensions (LxWxH)	234 x 123 x 96 mm (9-1/4 x 4-7/8 x 3-3/4")
Net weight	0.92 kg (2.0 lbs.)



40Vmax



**XGT BL AWS XPT**

Dust bag, Abrasive disc, Pad saver disc, Battery adapter set, Arm band complete, Front cuff, Battery, Charger, Z: Battery and Charger are sold separately



- Excellent maneuverability / Lightweight design
- Powered by 40Vmax XGT Li-Ion battery / BL motor
- Connected via connector
- New abrasive disc and abrasive paper (net type)
- Pad saver can be attached to the pad with the hook and loop fastener
- Built-In Dust Extraction System
- Compatible with AWS (Auto-start Wireless System)

**BO003CGZ** Battery Powered Random Orbit Sander

**New**

Designed to be lightweight with the connector-style connection to the battery

Orbit diameter	3.0 mm (1/8")
Abrasive Disc Size	125 mm (5")
Orbits Per Minute (OPM)	6,000-10,000 min <sup>-1</sup>
Abrasive disc fastening system	Hook & loop
Sound pressure level	77 dB(A)
Vibration level	2.9 m/s <sup>2</sup>
Dimensions (LxWxH)	233 x 123 x 96 mm (9-1/8 x 4-7/8 x 3-3/4")
Net weight	0.91 kg (2.0 lbs.)



40Vmax



**XGT BL AWS XPT**

Dust bag, Abrasive disc, Pad saver disc, Battery adapter set, Arm band complete, Front cuff, Battery, Charger, Z: Battery and Charger are sold separately

**BO006CGZ** Battery Powered Orbital Sander

**New**

Designed to be lightweight with the connector-style connection to the battery

Orbit diameter	3 mm (1/8")
Abrasive Disc Size	Square: 80 x 130 mm (3-1/8 x 5-1/8") Triangular: 100 x 150 mm (3-15/16 x 5-7/8")
Orbits Per Minute (OPM)	6,000-10,000 min <sup>-1</sup>
Abrasive disc fastening system	Hook & loop
Sound pressure level	76 dB(A)
Vibration level	2.6 m/s <sup>2</sup>
Dimensions (LxWxH)	263 x 100 x 99 mm (10-3/8 x 3-15/16 x 3-7/8")
Net weight	0.93 kg (2.1 lbs.)



40Vmax



**XGT BL AWS XPT**

Dust bag, Abrasive paper, Pad saver, Battery adapter set, Arm band complete, Pad protector, Front cuff, Battery, Charger, Z: Battery and Charger are sold separately

## DTC100

Cordless Cable Cutter (Closed type)



## DTC101

Cordless Cable Cutter (Open type)



### DTC100ZK (Close Type)

Cordless Cable Cutter

**New**

Closed type for precision cutting

Li-ion Ah 6.0 5.0 3.0 1.5



Max. cutting diameter 50 mm (2")  
Max cable cutting capacity 1600V-CV: 500mm<sup>2</sup> single-core (38mm (1-1/2)), 6600V-CV: 500mm<sup>2</sup> single-core (45mm (1-3/4)), 600V-IV: 500mm<sup>2</sup> single-core (35mm (1-3/8)), 600V-VVR: 150mm<sup>2</sup> triple-core (47mm (1-7/8))

Dimensions (L x W x H) w/ BL1830B / BL1850B / BL1860B: 116 x 197 x 363 mm (4-9/16 x 7-3/4 x 14-1/4")  
Net weight 2.9 kg (6.4 lbs.)

18V



Blade, Z: Battery and Charger are sold separately



Cutting completed

Forward switch OFF

### Opening angle setting dial

6 stages (ø10 - 50 mm)

### LED job light

One LED with afterglow function

### DTC101ZK (Open Type)

Cordless Cable Cutter

**New**

Open type for easy cutting of cable at desired position

Li-ion Ah 6.0 5.0 3.0 1.5



Max. cutting diameter 50 mm (2")  
Max cable cutting capacity 600V-CV: 500mm<sup>2</sup> single-core (38mm (1-1/2)), 6600V-CV: 500mm<sup>2</sup> single-core (45mm (1-3/4)), 600V-IV: 500mm<sup>2</sup> single-core (35mm (1-3/8)), 600V-VVR: 150mm<sup>2</sup> triple-core (47mm (1-7/8))

Dimensions (L x W x H) w/ BL1830B / BL1850B / BL1860B: 116 x 190 x 430 mm (4-9/16 x 7-1/2 x 17")  
Net weight 3.6 kg (7.9 lbs.)

18V



Blade, Z: Battery and Charger are sold separately

- 18V LXT Li-Ion Cordless Cable Cutter
- Easy operation, provide excellent maneuverability
- Closed type for precision cutting
- Open type for easy cutting of cable at desired position
- For cutting Al / Cu cable
- Automatic reverse function
- The movable blade automatically returns to the set position after the cutting is completed
- Adjustable blade return volume
- The blade opening angle can be adjusted to suit the diameter of the cable to be cut
- One LED job light with afterglow function

# DRT52

## Cordless Trimmer



- 18V LXT BL motor, Collet size: 6mm, 1/4"
- BL motor provides output efficiency similar or superior to that of the corded models 3709/3711
- Equipped with Lock/unlock button (for off/on of Standby mode)
- LED lamp for indication of being unlocked (= in standby mode)
- Soft start function minimizes start-up shock and makes the tool start smoothly



### DRT52Z 6mm (1/4") Cordless Trimmer

**New**

18V LXT BL Brushless Cordless 6 mm (1/4") Trimmer

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5

Collet Capacity	6 mm (1/4")
No Load Speed (RPM)	30,000 min <sup>-1</sup>
Max output	580 W
Dimensions (L x W x H)	w/ BL1830B / BL1850B / BL1860B: 134 x 90 x 220 mm (5-1/4 x 3-1/2 x 8-5/8")
Net weight	1.4 - 1.7 kg (3.1 - 3.7 lbs.)



18V



Wrench, Templet guide, Chip deflector, Straight bit, Trimmer guide assembly, Straight guide assembly, Battery, Charger, Z: Battery and Charger are sold separately

# UB004C

## Battery Powered Backpack Blower



With Flat nozzle

With End nozzle 74

- A battery powered blower powered by Portable Power Pack PDC1500 or PDC1200
- The machine operates at a high blowing force of 25N with no time limit, and at 28N in Boost mode with a time limit
- BL motor with 1,500Wh high capacity
- Position-adjustable grip
- Redesigned backpack harness section for more comfortable backpacking experience



### UB004CZ Battery Powered Backpack Blower

**New**

BL Brushless Battery Powered Variable Speed Backpack Blower

Max Air Volume (w/ PDC1500)	Cruise Control Mode: 1/2/3:	8.9/15.4/19.7 m <sup>3</sup> /min
	Boost Mode:	20.9 m <sup>3</sup> /min
Max Air Velocity (w/ PDC1500)	Cruise Control Mode: 1/2/3:	34.9 / 60.0 / 76.3 m/s
	Boost Mode:	80.7 m/s
Blowing Force (w/ PDC1500)	Cruise Control Mode: 1/2/3:	5 / 15 / 25 N
	Boost Mode:	28 N
No load speed (RPM)	Cruise Control Mode: 1/2/3:	10,500/18,000/22,500 min <sup>-1</sup>
	Boost Mode:	23,800 min <sup>-1</sup>
Continuous run time on a full battery charge		55-200 min
Dimensions (L x W x H)	w/o Nozzle:	470 x 590 x 590 mm
Net Weight		18.9 kg (41.7 lbs.)




End nozzle, Flat nozzle


## Sanding Disc / Sanding Delta

### Net Type

- Less clogging lead to long-lasting sanding efficiency
- Easy to install compared to sanding paper
- Cost saving
- Suitable for construction Industry, DIY users
- 10pcs per package

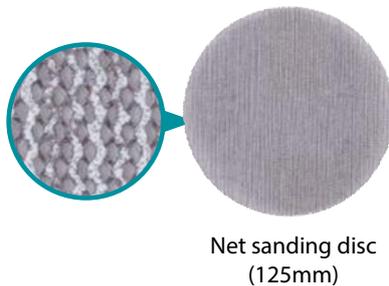

Net sanding disc (Grit)  
D-78651 (A80)  
D-78667 (A120)  
D-78673 (A180)  
D-78689 (A240)  
D-78695 (A320)




Net sanding delta (Grit)  
D-78891 (A80)  
D-78900 (A120)  
D-78916 (A180)  
D-78922 (A240)  
D-78938 (A320)

## D-78704 / D-78944

### Pad Saver

- Reducing wear of pad
- Pad saver can be attached to the pad with the hook and loop fastener
- A pad saver must be used in combination with a net abrasive
- 2pcs per package



## D-77338

### TCT Saw Blade for Wood

- Chip saw that comes standard with the 260mm slide circular saw. (LS1110F)
- Wood processor, Interior decorator, Furniture factory, Carpenter
- Tip shape is ATB



## D-79566

### Diamond wheel for concrete

- Cutting efficiency is improved by reducing blade thickness
- Masonry worker, decorator, construction worker
- Size: 105x20mm
- Meets EN standards



# Nutsetter E-form (NZ)

## Magnetic Nutsetter



- Size(mm) : 7, 8, 10, 12, 13
- Comes with a magnet to hold screws and bolts, screws will not fall out even when working at heights or with one hand
- Repair shop, equipment manufacturer, DIY users and etc

D-78601



D-78617



D-78623



D-78639



D-78645



# B-67206 / B-67212

## Recipro Saw Blade

- Rescue TC tipped
- For wood with nails, metal, wood with steel elements, cast steel pipe, glass fiber reinforced plastic, epoxy
- The blade width wide as 25mm and easy to cut straight with high ability to cut a straight line
- Suitable to use in rescue site required such as vehicles, construction and etc
- 25pcs per package



B-67206 (6") B-67212 (9")

# E-22931

## Thin Cut-off Wheel

- 0.8mm thin cut-off wheel with long life
- For construction industry, steel industry, piping industry, shipbuilding industry, petroleum industry, etc
- Outer dia. 100mm, Thickness 0.8mm, Inner dia. 16mm, Grit Z60V
- Less burrs after cutting, ideal for cutting threaded rod
- Sulfur-free, prevents rust



# Makita®



**COMING  
SOON**



Visit us at:  
[www.makita.com.sg](http://www.makita.com.sg)

 @MakitaSG

2024/25 (VERSION 2.0)

®

# Makita



# NEW LAUNCH

FEATURES / COMING SOON

**XGT**

**LXT**

**CXT**

EXPAND YOUR LITHIUM LINE UP

## PP001G

### Cordless Hole Puncher



Automatic punch return



- Equipped with the 40Vmax XGT Li-Ion battery
- High-efficiency punching with high-power BL motor
- Compatible with various steel materials (steel, stainless steel, channel steel, aluminum and copper)
- 360° rotatable motor section
- Return lever
- Punching up to a maximum plate thickness of 9mm and a hole diameter of  $\varnothing$ 20mm



### PP001GZK Cordless Hole Puncher

**New**

40Vmax XGT BL Cordless Hole Puncher

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Capacity	Steel: 20 mm Stainless steel: 20 mm
Dimensions (L x W x H)	w/ BL4020 / BL4025: 398 x 129 x 315 mm (15-5/8 x 5-1/8 x 12-3/8")
Net weight	11.6 - 12.8 kg (25.6 - 28.2 lbs.)

40Vmax XGT BL XPT 1

Punch, Die, Grip, Bar for fastening nuts, Hex wrench, Wrench, Screw, Spanner  
Z: Battery and Charger are sold separately

## TW002G

### Cordless Impact Wrench



- BL motor delivers 1,700 N·m (1,250 ft.lbs.) of max torque and 2,200 N·m (1,620 ft.lbs.) of nut-busting torque
- Electronic 4 stage impact power selection for added versatility
- 3 modes of reaction time for automatic stop available both in forward and reverse rotation modes
- Trigger switch with full speed mode allows for less hand and finger fatigue
- Style of socket retention: C ring



### TW002GM201 (RM2J) / GZ

#### 12.7mm (1/2") Cordless Impact Wrench

**New**

1,700 N·m (1,250 ft.lbs.) Impact Wrench, Reverse Rotation Auto Stop Mode

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Square Drive	12.7 mm (1/2")
Max Fastening Torque	1,700 N·m (1,250 ft.lbs.)
Nut-busting torque	2,200 N·m (1,620 ft.lbs.)
No Load Speed (RPM)	Max / Hard / Med / Soft: 0 - 1,800 / 0 - 1,000 / 0 - 900 / 0 - 850 min <sup>-1</sup>
Impacts Per Minute (IPM)	Max / Hard / Med / Soft: 0 - 2,400 / 0 - 2,000 / 0 - 1,800 / 0 - 1,700 min <sup>-1</sup>
Dimensions (L x W x H)	w/ BL4025: 213 x 94 x 297 mm (8-3/8 x 3-11/16 x 11-3/4")
Net weight	3.9 - 5.1 kg (8.6 - 11.2 lbs.)

40Vmax XGT BL XPT

Belt clip, Battery, Charger, Hook, Z: Battery and Charger are sold separately

# TW010G

## Cordless Impact Wrench

**Max. fastening torque**  
**3,150 N·m**

6 seconds after seating, when tightening

- Square drive D-handle impact wrench powered by a 40Vmax XGT Li-Ion battery
- An excellent combination of high torque and maneuverability
- Trigger switch with full speed mode
- Ring illumination LED
- For tightening large diameter bolts
- Auto-stop system available in both forward/reverse rotation modes



### TW010GZ

#### 25.4mm (1") Cordless Impact Wrench

**New**

40Vmax XGT BL Cordless 1" (25.4 mm) 3,150 N·m (2,320 ft.lbs.) Impact Wrench

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



Square Drive	25.4 mm (1")
Max fastening torque	3,150 N·m (2,323 ft.lbs.)
Fastening torque	Max/Hard / Med. / Soft: 2,850 / 1,600 / 1,000 / 600 N·m
Nut-busting torque	4,000 N·m (2,950 ft.lbs.)
Fastening capacities	Standard bolt: M27 - M45 High strength bolt: M20 - M33
No Load Speed (RPM)	0 - 1,200 / 0 - 850 / 0 - 700 / 0 - 600 min <sup>-1</sup>
Impacts per minute (IPM)	0 - 1,750 / 0 - 1,500 / 0 - 1,300 / 0 - 1,200
Dimensions (L x W x H)	w/BL4050F: 570 x 135 x 297 mm
Net weight	12.0 - 12.9 kg

40Vmax



XGT BL XPT

Side handle, Tool hanger (Ring), Battery, Charger, Z: Battery and Charger are sold separately

# PS001G

## Cordless Polisher Scrubber

- 40Vmax XGT BL Cordless Polisher Scrubber
- Wobble suppression and Constant speed control
- Brush/Pad replacement without direct contact
- 3-speed settings
- Various brushes and pads are available to suit different applications.
- Adjustable and easy-to-grip handle design and Telescopic pipe adjustable with a lever



### PS001GZ

#### Cordless Polisher Scrubber

**New**

Wobble suppression and Constant speed control

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0



No load speed	High / Med / Low: 600 / 350 / 150 min <sup>-1</sup>
Attachment size	Brush: 190 mm (7-1/2") Floor pad: 200 mm (7-7/8")
Telescopic pole	1,081 - 1,435 mm (42-1/2 - 56-1/2")
Continuous use	High / Med / Low: 30 / 50 / 140 min 189 mm (7-7/16")
Head height	1,081 - 1,435 x 204 x 361 mm (42-1/2 - 56-1/2 x 8 x 14-1/4")
Net weight	4.4 - 5.6 kg (9.7 - 12.3 lbs.)

40Vmax



XGT BL XPT

Floor pad, Brush, Pad holder, Accessory bag, Splash guard, Battery, Charger, Z: Battery and Charger are sold separately

## UC022G

### Cordless Chain Saw



- Cutting performance and weight equivalent to or superior to 35mL class engine chainsaws
- High efficiency and lightweight design
- New lock-off mechanism
- New toolless tension adjustment of saw chain
- Excellent acceleration and Restartability (When Locked)
- Metal spike bumper firmly grips workpiece to provide more control, making cutting easier



## UC022GZ 350mm (14") Cordless Chain Saw

**New**

40Vmax XGT BL Brushless Cordless 35 cm (14") Chain Saw

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Guide Bar Length	350 mm (14")
Chain type	80T XL
Chain Pitch	0.325"
Chain Gauge	1.1 mm (0.043")
Chain Speed	0 - 25.5 m/s
Chain Oil Tank Volume	200 mL (6.8 US oz)
Dimensions (L x W x H)	w/o Guide bar, w/ BL4050F: 430 x 225 x 271 mm (17 x 8-7/8 x 10-5/8")
Net weight	5.1 - 5.4 kg (11.2 - 11.9 lbs.)



40Vmax



Guide bar, Saw chain, Guide bar case, Wrench, Round file, Chain oil, Battery, Charger, Chain cover, Glass laser visibility, Z: Battery and Charger are sold separately

## UC029G

### Cordless Pruning Saw

Work amount  
**415 pcs.**

Battery: BL4025

Test conditions  
Cut ø50 cypress wood under an optimal pressing load of 25N or less on the cutting edge



- Lightweight and compact body
- Tool-less change and tension adjustment of the saw chain
- Automatic chain lubrication minimizes the chance that saw chain will stall due to a lack of chain oil
- Chain oil view window allows operator to easily check oil level
- Lock-off lever accessible from both sides
- A hook with quick attachment/detachment (Optional accessory)



## UC029GZ Cordless Pruning Saw

**New**

40Vmax XGT BL Cordless 150 mm (6") Pruning Saw

Li-ion Ah 8.0 | 5.0 | 4.0 | 2.5 | 2.0

Guide bar length	150 mm (6")
Saw chain	Type: 80T XL Pitch: 0.325" Gauge: 1.1 mm (0.043")
Oil tank capacity	55 mL (1.9 oz)
Chain speed	8.0 m
Dimensions (L x W x H)	w/ BL4025: 474 x 95 x 255 mm (18-5/8 x 3-3/4 x 10")
Net weight	2.1 - 2.4 kg (4.6 - 5.3 lbs.)



40Vmax



Oil vessel set, Guide bar, Saw chain, Battery, Charger, File holder set, Chain cover  
Z: Battery and Charger are sold separately

# ML012G

Cordless Bar Light



# DML818

Cordless Bar Light



- Bar type light for wide area illumination, 1,700 Lumens
- Supplied Telescopic hook allows user to attach the appliance to the hood, back door and more of vehicles, making it ideal for use in automotive industry
- LED light bar can be folded in half
- Rotating LED light bar clockwise 90 degrees or counterclockwise 180 degrees, user can adjust the lighting angle to 7 angles where click stop is provided
- Top hook and 3 strap holes for hanging use
- Press-button switch for High / Med / Low 3 brightness settings: 1,700 / 800 / 400 lumens
- 3 lighting mode selection with mode memory function
- Battery capacity warning function



## ML012G Cordless Bar Light

**New**

40Vmax XGT Cordless Bar Light, 1,700 Lumens

Li-ion **8.0** 5.0 4.0 2.5 2.0

Color temperature	Daylight white: 5,000 K
Brightness setting	3
Luminous flux	High / Med. / Low: 1,700 / 800 / 400 lm w/ BL4040, High / Med. / Low: 7 / 15 / 32 hours at 0.5m from the light source, w/ all 42 LEDs on, High / Med. / Low: 2,000, 1,000, 450 lx at 1.0m from the light source, w/ all 42 LEDs on, High / Med. / Low: 600, 300, 100 lx w/o Battery:
Continuous use	
illuminance	
Dimensions (L x W x H)	972 x 85 x 100 mm
Net weight	2.0 kg (4.4 lbs.)



40Vmax **XGT XPT**

Telescopic hook, Shoulder strap, Battery and Charger are sold separately

## DML818 Cordless Bar Light

**New**

14.4V/18V LXT Cordless Bar Light, 1,700 Lumens

Li-ion **6.0** 5.0 3.0 1.5

Color temperature	Daylight white: 5,000 K
Brightness setting	3
Luminous flux	High / Med. / Low: 1,700 / 800 / 400 lm w/ BL1860B, High / Med. / Low: 5 / 11 / 23 hours w/o Battery:
Continuous use	
Dimensions (L x W x H)	972 x 80 x 101 mm (38-1/4 x 3-1/8 x 4")
Net weight	1.7 kg (3.7 lbs.)



18V 14.4V **LXT XPT**

Telescopic hook, Shoulder strap, Battery and Charger are sold separately

## DTC102

Cordless Cable Cutter (Closed type)



## DTC103

Cordless Cable Cutter (Closed type)



For cutting ACSR  
(Aluminum  
Conductors Steel  
Reinforced).

### DTC102ZK (Close Type)

Cordless Cable Cutter

**New**

Closed type for cutting Al / Cu cable

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Max blade opening width 65 mm (2-9/16")  
Max cable cutting capacity Non-ferrous materials only (Al or Cu): 65 mm (2-9/16")  
Dimensions (L x W x H) w/ BL1830B / BL1850B / BL1860B: 116 x 240 x 401 mm (4-9/16 x 9-1/2 x 15-3/4")  
Net weight 3.5 kg (7.7 lbs.)

18V



Blade, Z: Battery and Charger are sold separately

### DTC103ZK (Close Type)

Cordless Cable Cutter

**New**

Closed type for cutting ACSR (Aluminum Conductors Steel Reinforced)

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Max blade opening width 54 mm (2-1/8")  
Max cable cutting capacity ACSR: Al 550mm<sup>2</sup> / ST 70mm<sup>2</sup>  
Dimensions (L x W x H) w/ BL1830B / BL1850B / BL1860B: 116 x 240 x 401 mm (4-9/16 x 9-1/2 x 15-3/4")  
Net weight 5.5 kg (12.1 lbs.)

18V



Blade, Z: Battery and Charger are sold separately

- 18V LXT Li-Ion Cordless Cable Cutter
- Developed specially for cutting only, allowing for lightweight design to provide excellent maneuverability
- Closed type
- DTC102 for cutting Al / Cu cable
- DTC103 for cutting ACSR (Aluminum Conductors Steel Reinforced)
- Automatic reverse function
- The blade opening angle can be adjusted to suit the diameter of the cable to be cut
- One LED job light with afterglow function
- Shoulder belt is provided as an optional accessory



Cutting completed

Forward switch OFF

**Opening angle setting dial**

6 stages  
(ø10 - 50 mm)



**LED job light**

One LED with afterglow function



# DTD173

## Cordless Impact Driver



Max. fastening torque  
**180 N·m**

High Power & Slim Head

Overall length  
**111 mm**

- Compact and lightweight body with high power and maximum tightening torque of 180 N.m
- Can be used as a work light
- Offset battery backwards
- Slim head with no protrusion improves corner hitting performance in all directions
- New trigger switch
- Easy-to-see and use operation panel with "rear" placement



### DTD173RTJ / Z Cordless Impact Driver

New

18V LXT BL Cordless Wood/Bolt/T-Mode 180 N·m (1,590 in.lbs.) Impact Driver

Li-ion Ah 6.0 | 5.0 | 3.0 | 1.5



Capacity-Machine screw	M4 - M8 (5/32" - 5/16")
Standard Bolt	M5 - M16 (3/16" - 5/8")
High Tensile Bolt	M5 - M14 (3/16" - 9/16")
Coarse thread (in length):	22 - 125 mm (7/8" - 4-7/8")
Hex Shank	6.35 mm (1/4")
No Load Speed (RPM)	0 - 3,600 / 0 - 3,200 / 0 - 2,100 / 0 - 1,100 min <sup>-1</sup>
Impacts Per Minute (IPM)	0 - 3,800 / 0 - 3,600 / 0 - 2,600 / 0 - 1,100 min <sup>-1</sup>
Fastening torque	Hard / Med. / Soft: 170 / 50 / 20 N·m
Max Fastening Torque	180 N·m (1,590 in.lbs.)
Dimensions (L x W x H)	111 x 81 x 234 mm
Net weight	1.5 kg (3.3 lbs.)

18V



LXT BL XPT

Hook, Hand strap, Phillips bit, Battery, Charger, Z: Battery and Charger are sold separately

# UB003C

## Battery Powered Blower



- High power BL Brushless and Lightweight design
- 3 Speed mode button
- Variable control trigger plus Cruise control lever
- High water-resistance compatible with XPT / IPX4
- Delivers up to 60 minutes of run time using PDC1500 with maximum speed mode
- Harness of Portable Power Pack can be attached and Nozzle reducing reaction force



### UB003CZ Battery Powered Blower

New

Powerful blowing force (Max 24N)



Max Air Volume	w/ End nozzle, w/ PDC1500, Max speed mode: 17.6 m <sup>3</sup> /min
Max Air Velocity	w/ End nozzle, w/ PDC1500, Max speed mode: 86.0 m/s
Avg. Air Velocity	w/ End nozzle, w/ PDC1500, Max speed mode: 11.7 - 71.9 m/s
Blowing Force	w/ End nozzle, w/ PDC1500, Max speed mode: 0.7 - 24N
No Load Speed (RPM)	Mode1 / Mode2 / Modes: 4,000-10,600 / 17,700 / 22,100 min <sup>-1</sup>
Dimensions (L x W x H)	w/ Nozzle: 913 - 1,013 x 178 x 298 mm
Net weight	2.8 - 3.1 kg (6.2 - 6.8 lbs.)



End nozzle, Band assembly

## Recipro Saw Blade

### Bi-Metal for Metal Cutting

- Has long life and excellent cost performance in cutting carbon steel
- Uses cost-effective Bi-Metal material for metal cutting
- Size: 150 mm, 225 mm
- Equipment suppliers and dismantlers
- 2pcs per package



Overall Length: 150mm  
D-80298 (14 TPI)  
D-80313 (18 TPI)  
D-80335 (24 TPI)






Overall Length: 225mm  
D-80307 (14 TPI)  
D-80329 (18 TPI)  
D-80341 (24 TPI)

## Sleeve Chuck Bit Holder

### Impact BLACK for E-form (NZ)

- By extending the bit, tightening screws and drilling work are available in deep places
- 1/4" Hex shank accessories are attachable
- Bits can be attached by simply pushing itself into the adapter
- Improved work efficiency in various workplaces
- For constructors, equipment dealers (plumber, wiring worker, etc.), sheet metal processor, metal worker, automobile maintenance shops, etc
- Three sizes are available to accommodate screw tightening and drilling in deep locations at optimum lengths



**IMPACT**  
Impact driver's accessory series  
**BLACK**

## Cut-Off Wheel

### 3mm Thickness

- Cut-Off Wheel for cutting metal and stainless steel
- Superiority in terms of performance and price over competitors (Supraflex products)
- Off-set shape allows intercutting and cutting
- Oil industries, Gus industries, General construction, Steel industry, Plumber, Shipbuilding industry, ect.
- 5pcs per package



D-79996  
(100mm)

D-80014  
(125mm)

D-80020  
(180mm)

## Trimmer Head

### Bump & Feed (Flat type)

- A trimmer head with a flat bottom for improved work efficiency
- The quick loading mechanism allows you to load the nylon cord without disassembling
- The flat bottom makes it easy to trim grass while the trimmer head hitting the ground
- Grass can be cut lower as the spool is designed to be lower
- 100mm (4") M10X1.25LH



1914R8-6  
(Nylon Dia. 2.0mm)

1914R6-0  
(Nylon Dia. 2.4mm)

# Makita®



**COMING  
SOON**

Visit us at:  
[www.makita.com.sg](http://www.makita.com.sg)



 @MakitaSG